

# RC-260RA



Carbon-brush motors


OUTPUT : 0.4W~15W (APPROX)

WEIGHT : 28g (APPROX)

Typical Applications Home Appliances : Massager / Vibrator  
Toys and Models : Radio Control Model

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL	SPEED r/min	CURRENT A	SPEED r/min	CURRENT A	TORQUE mN-m	TORQUE g-cm	OUTPUT W	TORQUE mN-m	TORQUE g-cm	CURRENT A
RC-260RA-08450	8~16	12V CONSTANT	7800	0.040	5790	0.11	0.96	9.8	0.58	3.73	38	0.33
RC-260RA-18130	3~6	6V CONSTANT	13400	0.13	10930	0.58	1.63	16.6	1.86	8.83	90	2.55

## DIRECTION OF ROTATION

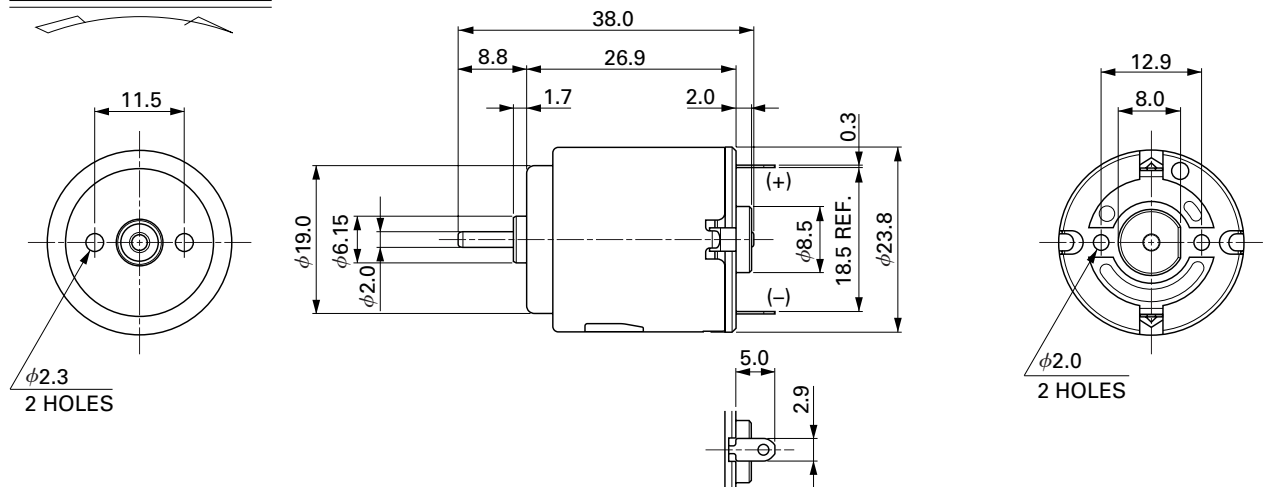

UNIT: MILLIMETERS

### RC-260RA-08450

12.0V

### RC-260RA-18130

6.0V

