



## APPLICATIONS

Power supply  
Power amplifiers  
EMI/RFI suppression

## FEATURES


Coated with varnish  
High saturation current  
Excellent high current rating

## PRODUCT IDENTIFICATION

JTI 5026 – 101 M


| | | | |  
 Type B-Base Size Inductance Tolerance  
 W-White bobbin  
 D-Double wire  
 H-Horizontal

## DIMENSIONS (mm)

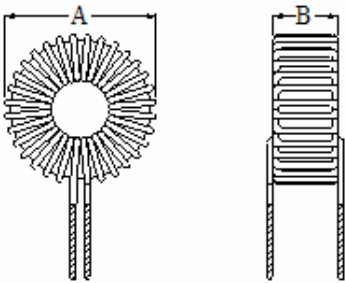


Part	A	B
JTI 6826B	21 Max.	12 Max.
JTI 3726~10626	14~32 Max.	11~18 Max.
JTI 3752~10652	14~32 Max.	11~18 Max.

## JTI

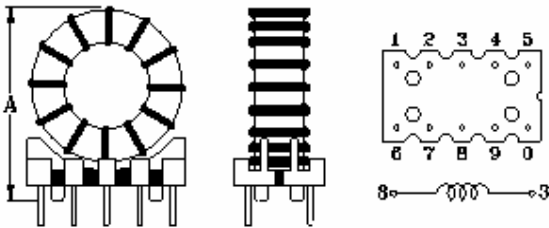

Part	A
JTIB 8026~10626	23.5~37 Max.

## JTIB

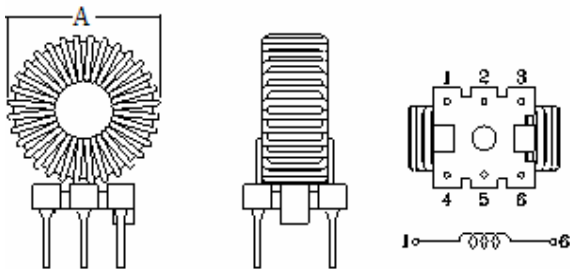


Part	A
JTIB 5026B	16.5 Max.

## JTIB 5026B


\*\*Customization service is available ,please contact Sales Dept. for more detail. \*\*

## DIMENSIONS (mm)

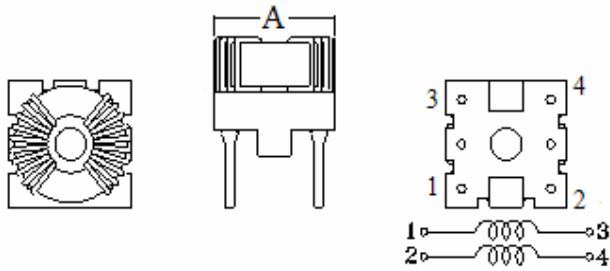


Part	A
JTIDB 090305	11.0 Max.

## JTIDB 090305

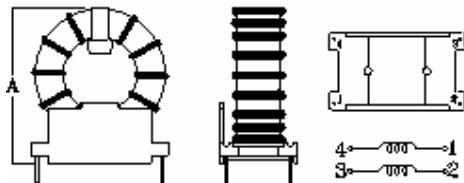


Part	A
JTIDB 341220	41.0 Max.

## JTIDB 341220

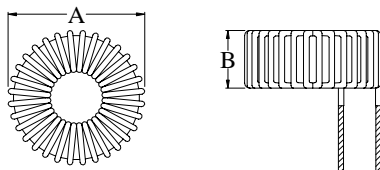


Part	A	B
JTIH 3726~10626	14~32 Max.	11~18 Max.
JTIH 3752~10652	14~32 Max.	11~18 Max.

## JTIH

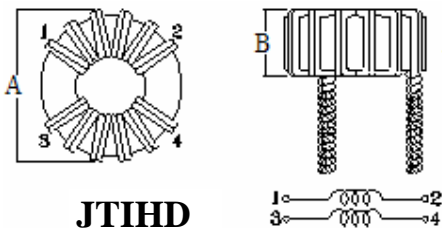

Part	A	B
JTIHD 9026	30.5 Max.	15 Max.

## JTIHD

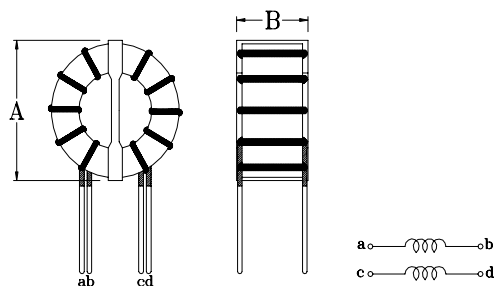

Part	A	B
JTIW 120706	15.0 Max.	14.0 Max.
JTIW 161208	21.0Max.	13.0 Max.
JTIW 221408	28.0 Max.	19.0 Max.
JTIW 251512	30.5 Max.	19.5 Max.
JTIW 311913	38.0 Max.	20.0 Max.

## JTIW

**\*\*Customization service is available ,please contact Sales Dept. for more detail. \*\***