


MKA-10110

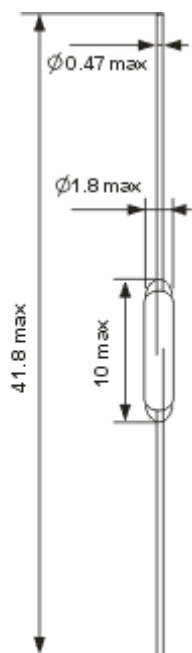

| Part No. | 型号 | MKA-10110 |
|--|--------------|---|
| Total Length | 总长度 | 41.8 mm |
| Glass Length | 玻璃长度 | 10 mm |
| Glass Diameter | 直径 | 1.8 mm |
| Contact Form | 触点形式 | 1A (SPST-NO) |
| Contact Position | 触点位置 | SYM |
| Contact Material | 触点材质 | Ru |
| Contact Rating | 触点负载 | 10W |
| Max. Switching Voltage | 最大开关电压 | 100 VDC / VAC |
| Max. Switching Current | 最大开关电流 | 0.5A |
| Contact Resistance (at initial value) | 接触电阻 (初始值) | 100 mOhms |
| Pull In Value (AT) | 启动值 | 10-35 |
| Drop Out Value (AT) | 释放值 | 4 |
| Operation Time | 动作时间 | 0.5 mSec.(Max.) |
| Release Time | 释放时间 | 0.3 mSec.(Max.) |
| Breakdown Voltage | 耐高压 | 150 VDC |
| Contact Capacitance | 触点电容 | 0.5 pF |
| Insulation Resistance | 绝缘电阻 | 10^9 Ohms |
| Resonant Frequency | 谐振频率 | 5 kHz |
| Operation Temperature | 工作温度范围 | -60 °C ~+125 °C |
| High Humidity | 最高湿度 | 98% (Max.) |
| Operation Frequency | 最高工作频率 | 400 Hz |
| Electrical Life | 电气寿命 | 5×10^6 (50mV, 5 μ A) 5×10^6 (5V, 10mA) 1×10^5 (24V, 250mA) |
| Test Coil | 测试线圈 | 5000 580 Ohm |
| Leads | 引线脚 | Gold-Plated 镀金 |
| Safety | 安全认证 | UL |